PROFESSIONAL AUTOMOTIVE LIFTING EQUIPMENT

2-POST LIFT

OPEN ACCESS. HEAVY-DUTY PERFORMANCE.

The K&L Two-Post Lift combines heavy-duty construction, smooth hydraulic operation, and a clearfloor design for professional automotive service. Adjustable column configurations and versatile lifting arms accommodate everything from low-profile vehicles and EVs to full-size trucks.

10,000 LB
LIFTING CAPACITY

78–80 IN.
LIFTING HEIGHT

CLEARFLOOR
OPEN-BAY DESIGN

BUILT FOR PROFESSIONAL SERVICE

62-66143

01
OPEN FLOOR ACCESS
Clearfloor design keeps the service area between columns unobstructed.

02
SMOOTH HYDRAULIC POWER
Direct-drive hydraulics provide consistent lifting performance.

03
ADJUST TO YOUR SHOP
Multiple height and width configurations fit different service bays.

04
BUILT-IN SAFETY
Choose mechanical auto-release or manual-release locking systems.

UNRESTRICTED ACCESS BENEATH THE VEHICLE AND ACROSS THE SERVICE BAY.

ADJUSTABLE ARM REACH ACCOMMODATES A WIDE RANGE OF VEHICLE SIZES.

Available in 9,000 lb and 10,000 lb configurations, the K&L Two-Post Lift provides heavy-duty lifting performance for professional automotive service facilities. Its clearfloor design keeps the area between the columns open, giving technicians easier access beneath the vehicle. A direct-drive hydraulic system provides smooth operation, while adjustable column configurations allow the lift to adapt to different service-bay layouts. Self-lubricating components help reduce routine maintenance, and manual- or auto-release safety lock configurations provide options to suit different shop requirements.

Lift More. Access More. Service with Confidence.

See complete product details and service information online.

800-727-6767 • sales@klsupply.com
dealer.klsupply.com

2-POST LIFT

PROFESSIONAL AUTOMOTIVE LIFTING EQUIPMENT

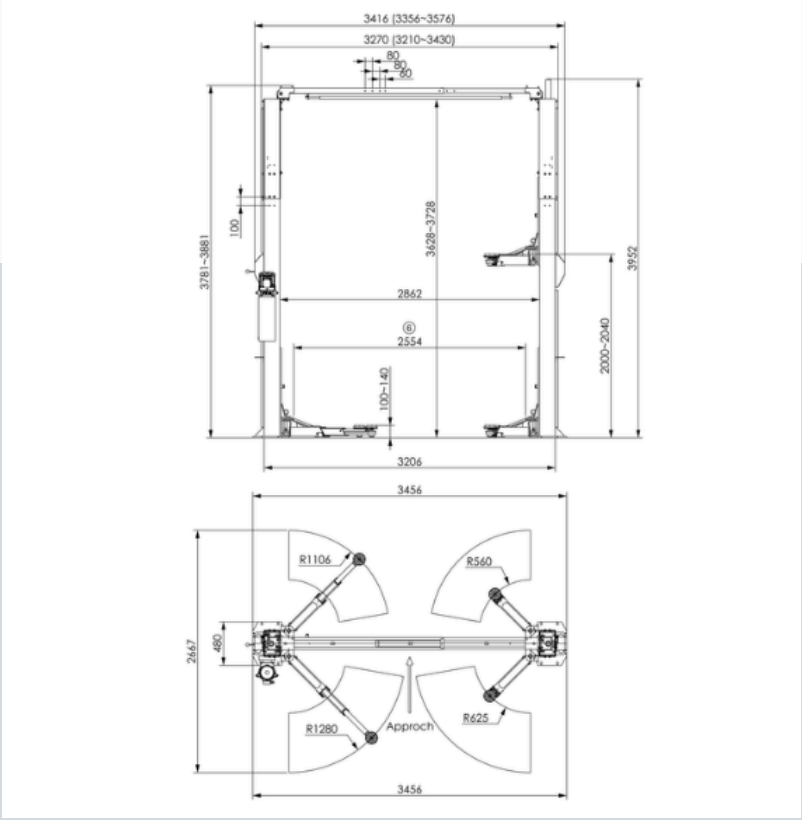

DIRECT-DRIVE HYDRAULIC POWER

Column-mounted power unit delivers smooth, reliable lifting while keeping the service bay clear.

PRODUCT SPECIFICATIONS

Lifting Capacity	9,000 or 10,000 lb
Lifting Height	78–80 in.
Lifting Speed	50–60 sec.
Descending Speed	30–45 sec.
Clearance Width	102.36 in.
Long Arm Reach	24.60–50.39 in.
Short Arm Reach	22.00–43.50 in.
Lock Release	Auto or Manual
Power Requirement	230V / 1PH / 60Hz / 25A

ENGINEERED FOR THE PROFESSIONAL BAY.

The K2 combines structural strength, adaptable installation, and low-maintenance design to provide dependable performance across a wide range of automotive service applications.

KOREAN PRECISION ENGINEERING

Developed for structural rigidity, smooth operation, and dependable performance.

SS400 STRUCTURAL STEEL

Constructed from heavy-duty hot-rolled structural carbon steel.

REDUCED ROUTINE MAINTENANCE

Self-lubricating components help reduce regular greasing and high-wear service.

ADJUSTABLE SHOP FIT

Multiple column configurations accommodate different ceiling heights and bay layouts.

EV-READY VERSATILITY

Suitable for low-profile vehicles, EV platforms, passenger cars, and full-size trucks.

SAFETY LOCK OPTIONS

Available with mechanical auto-release or manual-release locking systems.

RECOMMENDED APPLICATIONS

AUTOMOTIVE DEALERSHIPS & SERVICE CENTERS

RECOMMENDED APPLICATIONS

INDEPENDENT REPAIR & PERFORMANCE SHOPS

RECOMMENDED APPLICATIONS

EV, FLEET & LIGHT-TRUCK SERVICE FACILITIES

Built for the Demands of Professional Automotive Service.

See complete product details and service information online.

800-727-6767 • sales@klsupply.com
dealer.klsupply.com